

AQ1100 MFT-OLTS

Multi Field Tester OLTS

Optical Loss Test Set

*Supports MM850/1300 nm and SM1310/1550/1625 nm,
and up to +27 dBm with optical power meter*



Light Source + Optical Power Meter in One

- **Light Sources (3 models)**
 - SM1310/1550 nm
 - SM1310/1550/1625 nm
 - MM850/1300 nm and SM1310/1550 nm
- **Optical Power Meter Selections**
 - Standard: +10 to -70 dBm
 - High power: +27 to -50 dBm
 - PON : 1490/1550 nm Parallel measurement

Excellent Functionality and Operability


- 5.7 inch color LCD for easy viewing
- Multi-Language support
- Multi-core fiber measurement with a pair set
- Auto Loss Testing
- USB port for data storage
- PING Test function (optional)
- Visible light Source (optional)

QUALITY ■ INNOVATION ■ FORESIGHT

Multi Field Tester OLTS

AQ1100 MFT-OLTS

Top view

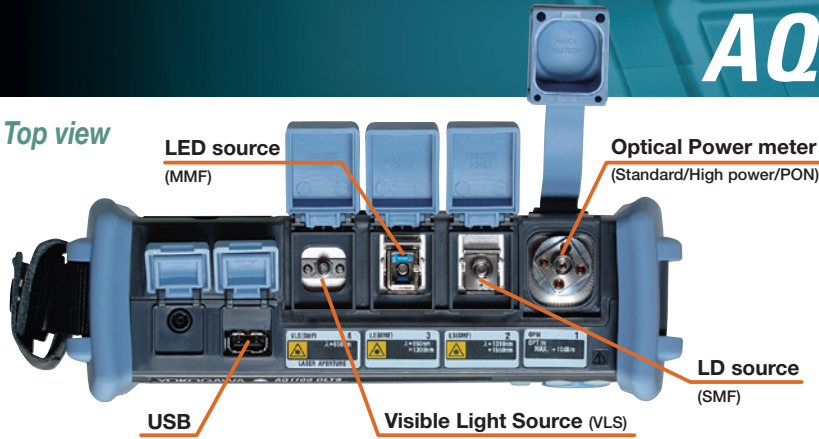

Specifications

Models		AQ1100A	AQ1100B	AQ1100D
Light source	Wavelength (nm) ¹⁾	1310/1550 ±25	1310/1550/1625 ±25	1310/1550 ±25 (SM) 850/1300 ±30 (GI)
	Light emitting device	LD	LD	LD (SM), LED (GI)
	SM (LD) Spectral width (nm) ^{1) 2)}	<5 / <10	<5 / <10 / <10	<5 / <10
	GI (LED) Spectral width (nm) ^{1) 3)} (FWHM)	—	—	40 (typ)/140 (typ)
	Optical output level (dBm)	-3 ±1	-3 ±1	SM: -3 ±1, GI: -20 ±1
	Level stability (dB) ⁴⁾	±0.05	±0.05	SM: ±0.05, GI: ±0.1
	Modulation mode	CW, CHOP (270 Hz, 1 kHz, 2 kHz) ⁵⁾		
	Applicable fiber	SM (ITU-T G.652), GI (50/125 μm)		
	Optical Connector	SC, FC, 1.25 mm dia. ferrule	SC/Angled-PC	SC, FC, 1.25 mm dia. ferrule
	Laser class	Class 1		

Built-in Optical Powermeter			
	Standard (/SPM)	High Power (/HPM)	PON (/PPM)
Wavelength setting	Simple mode: 850/1300/1310/1490/1550/1625/1650 nm Detail mode: 800 nm to 1700 nm, 1 nm step CWDM mode: 1270 nm to 1610 nm 20 nm step		
Applicable fiber	SM (ITU-T G.652) GI (50/125 μm)		
Power range	+10 to -70 dBm (CW) +7 to -70 dBm (CHOP)	+27 to -50 dBm (CW) +24 to -50 dBm (CHOP) ⁶⁾	+27 to -50 dBm: 1550 nm +10 to -70 dBm: 1310/1490 nm
Noise level	0.5 nW (-63 dBm, 1310 nm)	50 nW (-43 dBm, 1310 nm)	0.5 nW (-63 dBm, 1310 nm) 50 nW (-43 dBm, 1550 nm)
Uncertainty under standard conditions ⁷⁾	±5%	±5%	±0.5 dB (10%)
Readout resolution	0.01		
Level unit	Absolute: dBm, mW, μW, nW Relative: dB		
Modulation mode	CW CHOP (270/1 k/2 kHz)	CW CHOP (270/1 k/2 kHz)	CW
Average function	1, 10, 50 and 100 times		
logging function	Measurement intervals: 500 ms, 1 s, 2 s, 5 s, 10 s, Measurement count: 10 to 1000		

General Specifications	
Display	5.7 inch color LCD (640×480)
Loss test mode (only with /SPM or /HPM)	Auto loss test, Loopback test, Multi-core loss test
Internal memory	128 MByte
External interface	USB1.1 TypeA and TypeB (mini) 1 ea.
Power supply	AC adaptor: 100 to 120 VAC, 200 to 240 VAC, 50/60 Hz Battery: Li-ion, duration 6 hour ⁸⁾ , charging time 5 hours
Dimensions and mass	217.5 mm (W) × 157 mm (H) × 74 mm (D) (excl. projections) Approx. 1 kg (incl. internal battery)
Environmental condition	Operating environment: Temperature 0 to 45°C (0 to 35°C when charging the battery) Humidity 85% RH or less (no condensation) Storage environment: Temperature -20 to 60°C, Humidity 85% RH or less (no condensation)
Safety standard	EN61010-1
EMC	IEC/EN60825-1: 2007, GB7247.1-2012: Class 1 ¹⁰⁾ /Class 3R ¹¹⁾ FDA: 21CFR1040.10 ¹²⁾

Factory Installed Options	
Visible light source (/VLS)	Optical connector: 2.5 mm dia. ferrule type Wavelength and optical output level: 650 nm ±20 nm, peak value -3 dBm or more Modulation mode: CHOP 2 Hz Laser class: Class 3R
LAN interface (/LAN)	10BASE-T/100BASE-TX, RJ-45 connector Ping test, PC remote control

The specifications are at 23°C ±2°C unless otherwise noted. ¹⁾ 23°C ±2°C, CW ²⁾ RMS (2σ -20 dB) ³⁾ Envelope (-3 dB) ⁴⁾ for 15 minutes at a constant temperature within 23°C ±2°C ⁵⁾ CW and 270 Hz only at 850 nm and 1300 nm ⁶⁾ Except for 850 nm and 1650 nm ⁷⁾ 23°C ±2°C, standard conditions (CW, 1310 nm, 100 μW, SMF), at 1550 nm for /PPM ⁸⁾ LD ON. (in screen save mode) ⁹⁾ The visible light sources

Model and suffix codes

Model	Suffix code	Descriptions
AQ1100A		LS: 1310/1550 nm
AQ1100B		LS: 1310/1550/1625 nm
AQ1100D		LS: MM850/1300, SM1310/1550 nm
Language	-HE	English
	-HC	Chinese/English
	-HK	Korean/English
	-HR	Russian/English
	-H	Chinese standard, 250 V
Power cord	-D	UL/CSA standard, 125 V
	-F	VDE standard, 250 V
	-R	Australian standard, 250 V
	-Q	BS/Singaporean standard, 250 V
	-H	Chinese standard, 250 V
Optical power meter	-SPM	Optical power meter
	-HPM	High power optical power meter
	-PPM (AQ1100A only)	PON Optical power meter
Optical connector	-USC	SC type (LS port, and OPM port)
	-UFC	FC type (LS port, and OPM port)
	-ULC	LC type (LS port, and OPM port for -PPM), 1.25 mm dia. adapter (OPM port for -SPM and -HPM)
	-ASC (except AQ1100D)	SC/Angled-PC type (LS port, and OPM port for -PPM), SC type (OPM port for -SPM and -HPM)
Factory installed options	/VLS	Visible light source, optical connector: 2.5 mm dia. ferrule
	/LAN	Ethernet (10/100BASE-TX)
	/SB	Shoulder belt
AC adapter	/AC1	Alternative AC adapter


Standard Accessories

Power cord, AC adapter, battery pack, hand belt, user's manual (CD-ROM), operation guide

Accessories

Model	Suffix code	Descriptions
SU2006A		Soft carrying case
735480	-SCC	Connector adapter (SC)
(For optical power meters)	-FCC	Connector adapter (FC)
735481	-LMC	Ferrule adapter (1.25 mm dia.)
SU2005A	-SCC	Universal adapter (SC)
(For LS and PON optical power meter)	-FCC	Universal adapter (FC)
	-LCC	Universal adapter (LC)
739874 (AC adapter)	-D	UL/CSA standard, 125 V
	-F	VDE standard, 250 V
	-R	Australian standard, 250 V
	-Q	BS/Singaporean standard, 250 V
	-H	Chinese standard, 250 V
	-P	Korean standard, 250 V
	-T	Taiwanese standard, 125 V
739882	-N	Brazilian standard, 250 V
B8070CY		Battery pack (Spare)
		Shoulder belt

¹⁰⁾ CLASS 1 (IEC/EN60825-1: 2007, GB7247.1-2012) ¹¹⁾ CLASS 3R (IEC/EN60825-1: 2007, GB7247.1-2012) ¹²⁾ 21CFR1040.10



Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No.54, dated June 24, 2007
2-6-22 Nakatsu, Musashino-shi, Tokyo 184-8750, Japan

YOKOGAWA

http://tmi.yokogawa.com/

YMI-KS-HMI-SE05

YOKOGAWA TEST & MEASUREMENT CORPORATION

Global Sales Dept. /Phone: +81-422-52-6237 E-mail: tm@cs.jp.yokogawa.com
Facsimile: +81-422-52-6462

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA SHANGHAI TRADING CO., LTD.

YOKOGAWA ELECTRIC KOREA CO., LTD.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

YOKOGAWA INDIA LTD.

YOKOGAWA ELECTRIC CIS LTD.

YOKOGAWA AMERICA DO SUL LTDA.

YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)

Phone: +31-88-4641000
Phone: +86-21-6239-6363
Phone: +82-2-2628-3810
Phone: +65-6241-9933
Phone: +91-80-4158-6396
Phone: +7-495-737-78-68
Phone: +55-11-5681-2400
Phone: +973-17-358100

E-mail: tmi@us.yokogawa.com
E-mail: tmi@nl.yokogawa.com
E-mail: tech@ysh.com.cn
E-mail: TMI@kr.yokogawa.com
E-mail: TMI@sg.yokogawa.com
E-mail: tmi@in.yokogawa.com
E-mail: info@ru.yokogawa.com
E-mail: help.ymatmi@bh.yokogawa.com

Subject to Change without notice.

Copyright © 2009, Yokogawa Electric Corporation

Copyright © 2016, Yokogawa Test & Measurement Corporation

[Ed: 06/b]

Printed in Japan, 811(KP)

Facsimile: +86-21-6880-4987

Facsimile: +82-2-2628-3899

Facsimile: +65-6241-9919

Facsimile: +91-80-2852-1442

Facsimile: +7-495-737-78-69

Facsimile: +973-17-336100