


No. GT-BS12

Air Belt Sanders



The center of the arm becomes the center of gravity. This belt has been designed in an offset position so that it becomes aligned with the center of the arm when the unit is taken up. This slight difference in balance makes a big difference in reducing fatigue. A major ergonomic achievement.

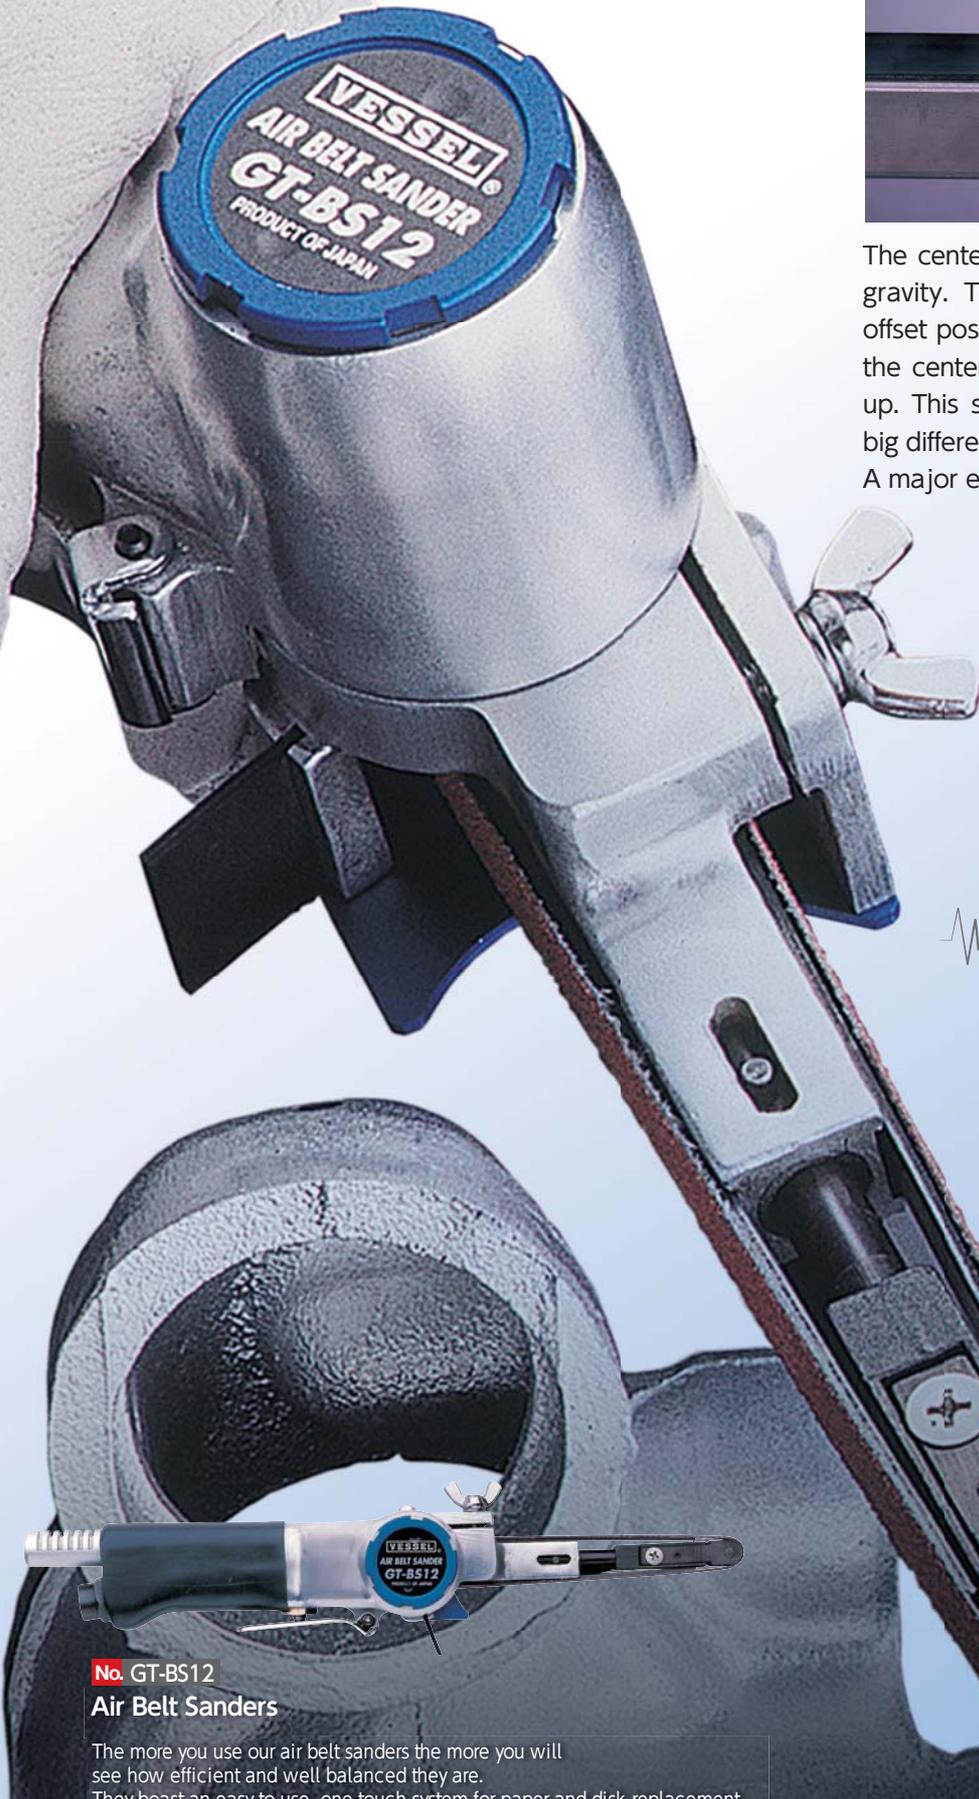

No. GT-BS12

Air Belt Sanders

The more you use our air belt sanders the more you will see how efficient and well balanced they are. They boast an easy-to-use, one-touch system for paper and disk replacement, and their delicate balance achieves a major reduction in fatigue.

HAND TOOLS

BITS & SOCKETS

ELECTRIC TOOLS

AIR TOOLS

STATIC SOLUTIONS

GASOLINE ENGINE TOOLS

Air Belt Sanders

Belt Width 12mm/10mm Compact and lightweight.



No. GT-BS12 PAT.

With noise reducer
Accessories
Sand belt #60...2pcs.
#80...1pc.

Belt Width 20mm Roller head can be chosen.



No. GT-BS20 PAT.

Aluminum roller head
With noise reducer



Aluminum
For heavy-duty sanding.

Accessories
Sand belt #60...2pcs.
#80...1pc.



Belt Width 30mm Roller head can be chosen.

No. GT-BS30 PAT.

Aluminum roller head
With noise reducer



Aluminum
For heavy-duty sanding.

No. GT-BS30W PAT.

Urethane roller head
With noise reducer



Urethane
For undulated and curved surfaces.



Accessories
Bar grip (Auxiliary handle)... 1pc.
Sand belt #60...2pcs.
#80...1pc.

Model No.	Applicable Belt Size	Belt Circumferential Speed (m/min)	Working Air Pressure (MPa)	No Load Speed (rpm)	Air Consumption (m ³ /min)	Hose Coupling	Overall Length (mm)	Weight (g)	Accessories		EDP No.
									Plug	L-wrench	
GT-BS12	12mm/10mm×330mm	1,100	0.6	17,000	0.52	Rc 1/4	311	840	BPB-2	H1.5	310621
GT-BS20	20mm×520mm	2,600	0.6	16,500	0.6	Rc 1/4	398	1,300	BPB-2	H2	310622
GT-BS30	30mm×540mm	2,040	0.6	13,000	0.72	Rc 1/4	374	1,930	BPB-2	H2.5	310624
GT-BS30W											310625

*Total length: When mounted with belt.

Air Disk Sanders

Disk Dia. 50mm Low speed of 5000 rpm & High torque.



Collet chuck
φ6mm



Sand belt #60...2pcs.
#80...1pc.

No. GT-DS50A

With noise reducer
Accessories
Flap wheel #60...1 pc.
Fiber wheel #600...1 pc.
Pitatto holder...1 pc.
Pitatto disk paper #60...3 pcs.



Disk bolt

Collet chuck (φ3mm, φ1/4", φ1/8")



Disk Dia. 100mm Low speed of 5000 rpm & High torque.



M10 disk nut



No. GT-DS50B

With noise reducer
Accessories
Protective cover
Disk nut
Pin wrench

Model No.	Disk Dia. (mm)	No Load Speed (rpm)	Air Consumption (m ³ /min)	Hose Coupling	Air Hose Inner Dia. (mm)	Overall Length (mm)	Weight (g)	Tip Tool Installation Part	Accessories		EDP No.
									Plug	Spanner	
GT-DS50A	50	5,000	0.65	Rc 1/4	6.35	211	935	Collet chuck φ6mm	BPB-2	H11,H15	310635
GT-DS50B	100	5,000	0.65	Rc 1/4	6.35	211	1,150	M10 Disk nut	BPB-2	Pin spanner,H15	310636

*Air pressure: 0.6MPa

HAND TOOLS

BITS & SOCKETS

ELECTRIC TOOLS

AIR TOOLS

STATIC SOLUTIONS

GASOLINE ENGINE TOOLS

Endless belts for air belt sander

No. CB12 Ceramic Endless Belt
(for GT-BS12)



Model No.	Size	Grit No.	Quantity	EDP No.
CB12-60	12mm×330mm	#60	50	350061
CB12-80	12mm×330mm	#80	50	350062
CB12-120	12mm×330mm	#120	50	350064


No. ZB20 Zirconia Endless Belt
(for GT-BS12)



Model No.	Size	Grit No.	Quantity	EDP No.
ZB20-40	20mm×520mm	#40	20	350067
ZB20-60	20mm×520mm	#60	20	350068
ZB20-80	20mm×520mm	#80	20	350069

Air Disk Sander Wheel (For DS50A) [See P162 One point→](#)

No. PD-P60 Pitatto Disk Paper

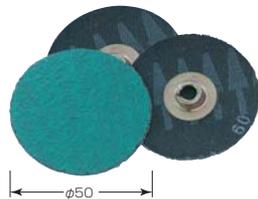

No. PD-P6 Pitatto Holder



No. FL-60,120 Flap Wheel



No. FB-400,600,1000 Fiber Wheel



Model No.	Grit No.	Max. Circumferential Speed (rpm)	Material	Use	Quantity	EDP No.
PD-P60	Z60	20,000	Zirconia	Thin pressed plate deburring, surfacing, etc.	50	350111
PD-P6	—	—	Rubber (Pad)	For Pitatto disk paper	1	350116
FL-60	A60	20,000	Alumina	Deburring, spatter removal Cylinder lining polishing, surfacing, etc.	5	350101
FL-120	A120	20,000	Alumina	Deburring, spatter removal Cylinder lining polishing, surfacing, etc.	5	350102
FB-400	400	10,000	Unwoven cloth	Dirt removal, cleaning prior to welding or plating, burn removal after welding, etc.	5	350106
FB-600	600	10,000	Unwoven cloth	Dirt removal, cleaning prior to welding or plating, burn removal after welding, etc.	5	350107
FB-1000	1000	10,000	Unwoven cloth	Dirt removal, cleaning prior to welding or plating, burn removal after welding, etc.	5	350108

Wheels to Remove Rust / Stains (For DS50B) [See P162 One point→](#)

No. HMW10 Hammer Wheel **PAT.P.**



No. BHW10 Brush Wheel



Model No.	Max. Circumferential Speed (rpm)	Material	Use	Quantity	EDP No.
HMW10	5,000	SUS	Slag and spatter removal after welding, etc.	1	350121
BHW10	5,000	Abrasive grain nylon	Steel plate rust removal, aluminum cast finishing, etc.	1	350122

Disk Dia. 100mm Handy & powerful grinder pursuing safety and usability.



No. GT-DG100



OP
Bar grip (Auxiliary handle)

Model No.	Grindstone Size Outer Dia.×Thickness×Hole Dia. (mm)	Belt Circumferential Speed (m/min)	No Load Speed (rpm)	Air Consumption (m ³ /min)	Hose Coupling	Overall Length (mm)	Height (mm)	Weight (g)	Accessories		EDP No.
									Plug	L-wrench	
GT-DG100	100×6×15	4,300	13,500	0.7	Rc 1/4	205	92	1,390	BPB-2	H6	310630

·Air pressure: 0.6MPa ·Air hose diameter: 6.35mm

One point

Application

Wheel

Tools

- For grinding inner cylinder and plane surface and removing burr (Grinding, welding press)

← Flap Wheel



No.FL-60
No.FL-120

- For removing dirt, cleaning welded parts and plate processed parts, removing scuffing, feathering, etc.

← Fiber Wheel



No.FB-400
No.FB-600
No.FB-1000

- For removing burr from thin metal sheet press, cutter mark, burr from aluminum casting, wood work, etc.

← Pitatto Holder + Pitatto Disk Paper



No.PD-P6
No.PD-P60

- For removing slag and spatter after welding, rust on steel members, burr on foundry pieces, shells on ship bottom, etc.

← Hammer Wheel



No.HMW10

- For removing rust on steel members, grain pattern finishing, finishing for aluminum casting

← Brush Wheel



No.BHW10

No.GT-DS50A



No.GT-DS50B

